



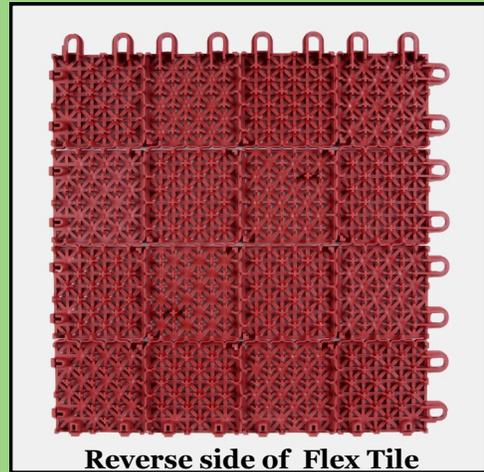

COVERDECK SYSTEMS®

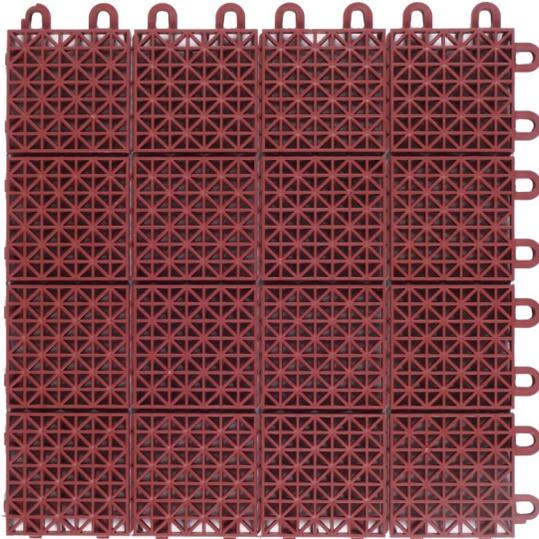

Reverse side of Flex Tile

1-800-550-3325

WWW.COVERDECK.COM

FLEX III TILE

SPECIFICATIONS:

ITEM NUMBER: 1804 Flex III—PP

DIMENSIONS: 12 1/8" X 12 1/8"

THICKNESS: 1/2"

TILE WEIGHT: .83 lbs.

Coverdeck Systems® FLEX III TILE offers a practical and functional way to cover floors inside and outside. Our Flex III Tile is ideal for all wet areas, including shower areas, locker rooms, pool decks, spas, and much more.



AQUA



BLACK



BROWN



DARK BLUE




FOREST GREEN



GRAY



GRASS GREEN



RED



SILVER



TAN



TERRA COTTA

COLOR CHOICES

FLEX III TILE

COVERDECK SYSTEMS® FLEX TILE offer practical and functional solutions to cover any floor. The tiles work both indoors and outdoors, and are an ideal solution for wet areas; the tiles sit 1/2" off the sub-floor allowing for instant drainage. The design of the surface and the supporting legs promote instant drainage. Water passes over the honeycombed surface and drains itself under the tile providing a self cleaning action. The unique snap together design makes installation easy and fast, requiring no special tools or adhesives. Our unique expansion joints allow the tiles to expand and contract individually to help prevent buckling.

COVERDECK SYSTEMS® FLEX III TILES are not affected by sea water or marine atmospheres making them a great choice for Boats and Docks. The easy to clean, **FLEX III TILES** are not damaged or stained by most chemicals including grease, oil, or petroleum based solutions.

SUB SURFACES:

FLEX TILES can be installed over any hard surface including existing decks.

FEATURES:

- Drains Instantly
- Installation is a SNAP
- No adhesives needed
- Covers unsightly existing floor area
- Acts as a anti-fatigue mat
- Mold and mildew resistant
- Withstands extreme temperatures
- Withholds 16,000 lbs of dead load
- Cost effective

APPLICATIONS:

- Shower areas
- Pool or Spa area
- Commercial Kitchen
- Patio
- Decks
- Balconies
- Garages
- Docks
- Locker rooms
- Shower areas
- Laundry Rooms
- Sunrooms
- Trade Shows
- Roof Decks
- Boats



FLEX TILE SPECIFICATIONS

- **SIZE:** 12 1/8" x 12 1/8" x 1/2"
- **LOADING:** 16,000 lbs. of dead load per sq. ft.
- **SUPPORT:** Surface supported by 328 oversized gusseted supports.
- **LOCKS:** 32 latch locks; 2 sides with 8 male parts; 2 sides with 8 female parts
- **FLAMMABILITY:** meets U294-HB standards
- **MATERIAL:** Polypropylene
- **SERVICE RANGE:** -30° to +170°
- **TENSILE STRENGTH** (psi) ASTM D638 5300
- **FLEXURAL MODULUS** (105 psi, 73° F) ASTM D790 1.6
- **TENSILE MODULUS** (105 psi) AST638 .82
- **THERMAL EXPANSION** (10-5 inches/inch/°C) 6.5
- **SPECIFIC GRAVITY** AST D792 .093
- **SPECIFIC VOLUME**, In 3/lb. 30.5
- **ELECTRICAL SPECIFICATIONS**
 - ARC RESISTANCE, SEC. ASTM D495..... 150
 - DIELECTRIC CONSTANT (1 M Hz).....2.5
 - DIELECTRIC STRENGTH (Volts/Mil)?.....660

**Resistant to Weak Acids, Weak Alkalies; Strong Alkalies
**Fungus and Mildew Resistant

